




Ma. 材質 SUJ2
Ha. 硬度 HRC60~64

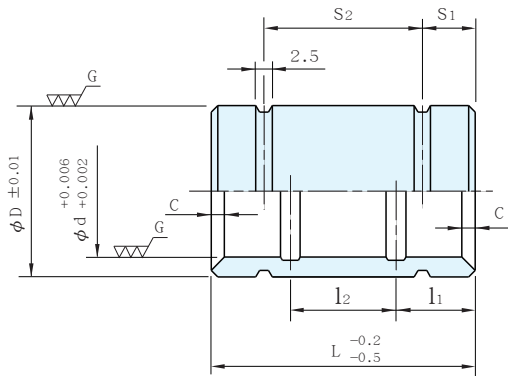

品 號		D	C	L							單 價
Type	d										
LBB	10	15	1	13	15	20	—	—	—	—	•
	13	18	1.5	13	15	20	25	—	—	—	•
	16	22		—	15	20	25	30	35	—	•
	20	26	2	—	—	20	25	30	35	40	•
	25	31		—	—	20	25	30	35	40	•
油溝尺寸			l ₁	6.5	8	10	12.5	9	11	12	
			l ₂	—	—	—	—	12	13	16	
接著溝尺寸			S ₁	8	10	5	7	6	7	8	
			S ₂	—	—	10	11	18	21	24	

注意

- ・精度基準請參閱P.125
- ・以輕滑配或厭氧膠(P.872)黏著固定
- ・高速導柱、導套、滾珠套專用之有機鉬強力潤滑劑請參考P.860

訂貨方式: 品 號 × L 交期: 1 天
LBB10 × 13