


Ma. 材質 SUJ2

Ha. 硬度 HRC60~64

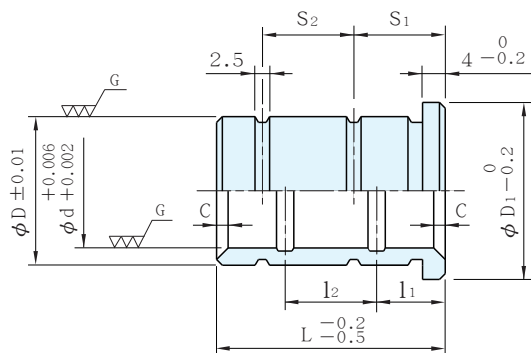

品 號		D	D ₁	C	L							單 價
Type	d											
LBA	10	15	20	1.0	13	15	20	—	—	—	—	•
	13	18	23	1.5	13	15	20	25	—	—	—	•
	16	22	27		—	15	20	25	30	35	—	•
	20	26	31	2.0	—	—	20	25	30	35	40	•
	25	31	36		—	—	20	25	30	35	40	•
油 溝 尺 寸				l ₁	6.5	8	10	12.5	9	11	12	
				l ₂	—	—	—	—	12	13	16	
接 著 溝 尺 寸				S ₁	9	12	15	16	17	15	16	
				S ₂	—	—	—	—	—	13	16	

Wa. 注意

- ・ 精度基準請參閱P.125
- ・ 以輕滑配或厭氧膠(P.872)黏著固定
- ・ 高速導柱、導套、滾珠套專用之有機鉬強力潤滑劑請參考P.860

訂貨方式: 品 號 × L 交期: 1 天
LBA10 × 13